




Lumistrips

DATASHEET

BACKMATRIX-49-3080 NICHIA LED MODULE WARM WHITE
CRI80 3000K 3000LM 49 LEDS 24V 25W 120° 29X29CM

SKU: 52794

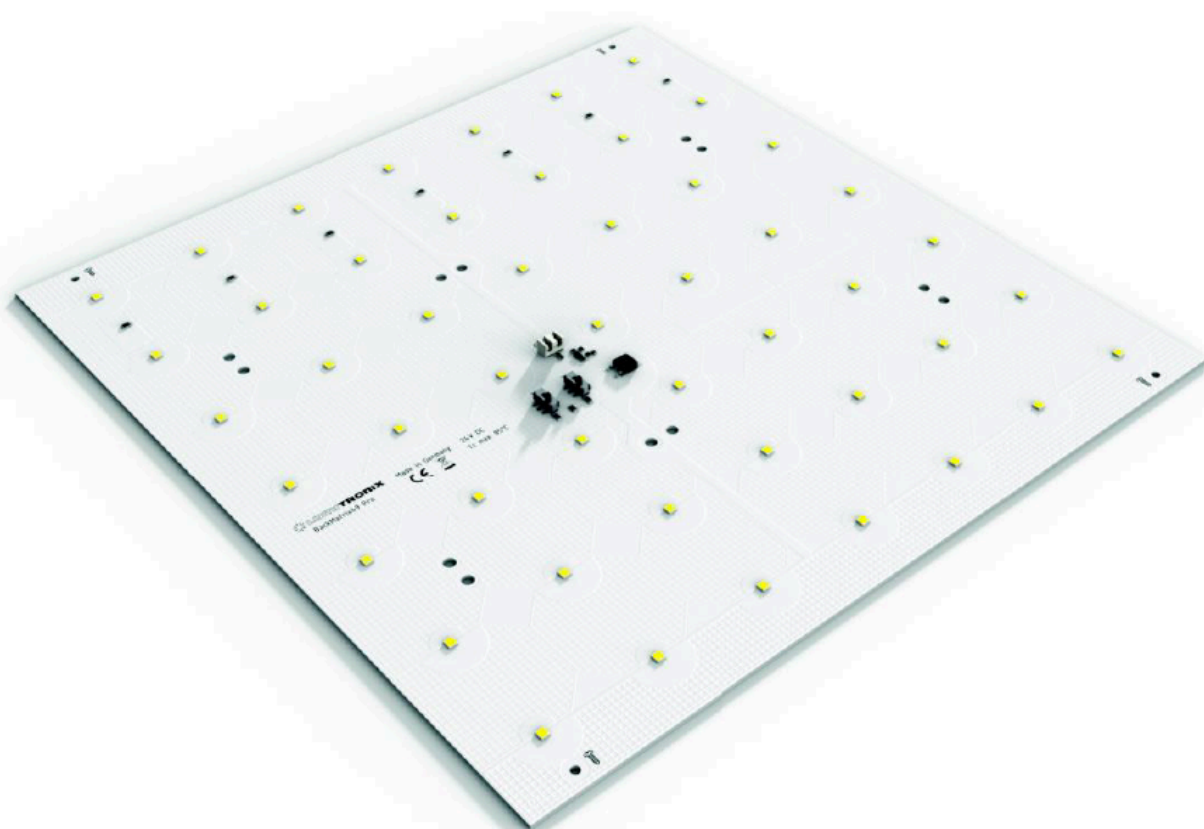


BACKMATRIX-49-3080 NICHIA LED MODULE WARM WHITE CRI80 3000K 3000LM 49 LEDS 24V 25W
120° 29X29CM


Article number (SKU)		52794	
Product name	BackMatrix-49-3080 Nichia LED Module warm white CRI80 3000K 3000lm 49 LEDs 24V 25W 120° 29x29cm (35000 lm/sqm)		
Classification	Professional		
Model identifier (equivalent models)	BackMatrix 49		
Photometric data (at TJ = 65°C, ± 10%)			
Light color	Warm white		
Binning	3-Step MacAdam		
Color temperature (K)	3000 K		
Dominant wavelength (nm)			
Luminous flux (lm)	1000 2090 3000 lm	35672 lm/sqm	
Radiant power (mW)			
CRI (Ra)	80		
Efficiency (lm/W)	131 124 119 lm/W		
Beam angle FWHP	120°		
Lifetime L80B10C1 (h)	>60000 h		
Photometric code	830/339		
Electrical data (at TJ = 65°C, ± 10%) (reference settings)			
Operating mode	Constant voltage		
Voltage (V)	24 V		
Current (mA)	350 700 1050 mA		
Power (W)	8.4 16.8 25.2 W	300 W/sqm	
Dimmable	Yes + on board 3 dimming levels (page 9)		
Dimensions / Mechanical data		Metric units	Imperial units
Length		290 mm	11.397"
Width		290 mm	11.397"
Height		7.1 mm	0.279"
Area (sqm / sqft)		0.0841 sqm	0.905sqft
Number of LEDs (pcs)	49 pcs		
Weight (g)	270 g		
Temperatures			
Operating temperature at Tc	-40 °C to +85 °C		
Ambient temperature	-40 °C to +50 °C		
Storage temperature	-40 °C to +100 °C		
Approvals / Certifications			
CE / RoHS / Reach	Yes		
EN 62471 Risk group	RG0		
Energy efficiency class	E		
Mains voltage luminous efficacy (lm/W)	119 lm/W		
Version			
Date	15. Sept. 2022		




BACKMATRIX-49-3080 NICHIA LED MODULE WARM WHITE CRI80 3000K 3000LM 49 LEDS 24V 25W
120° 29X29CM

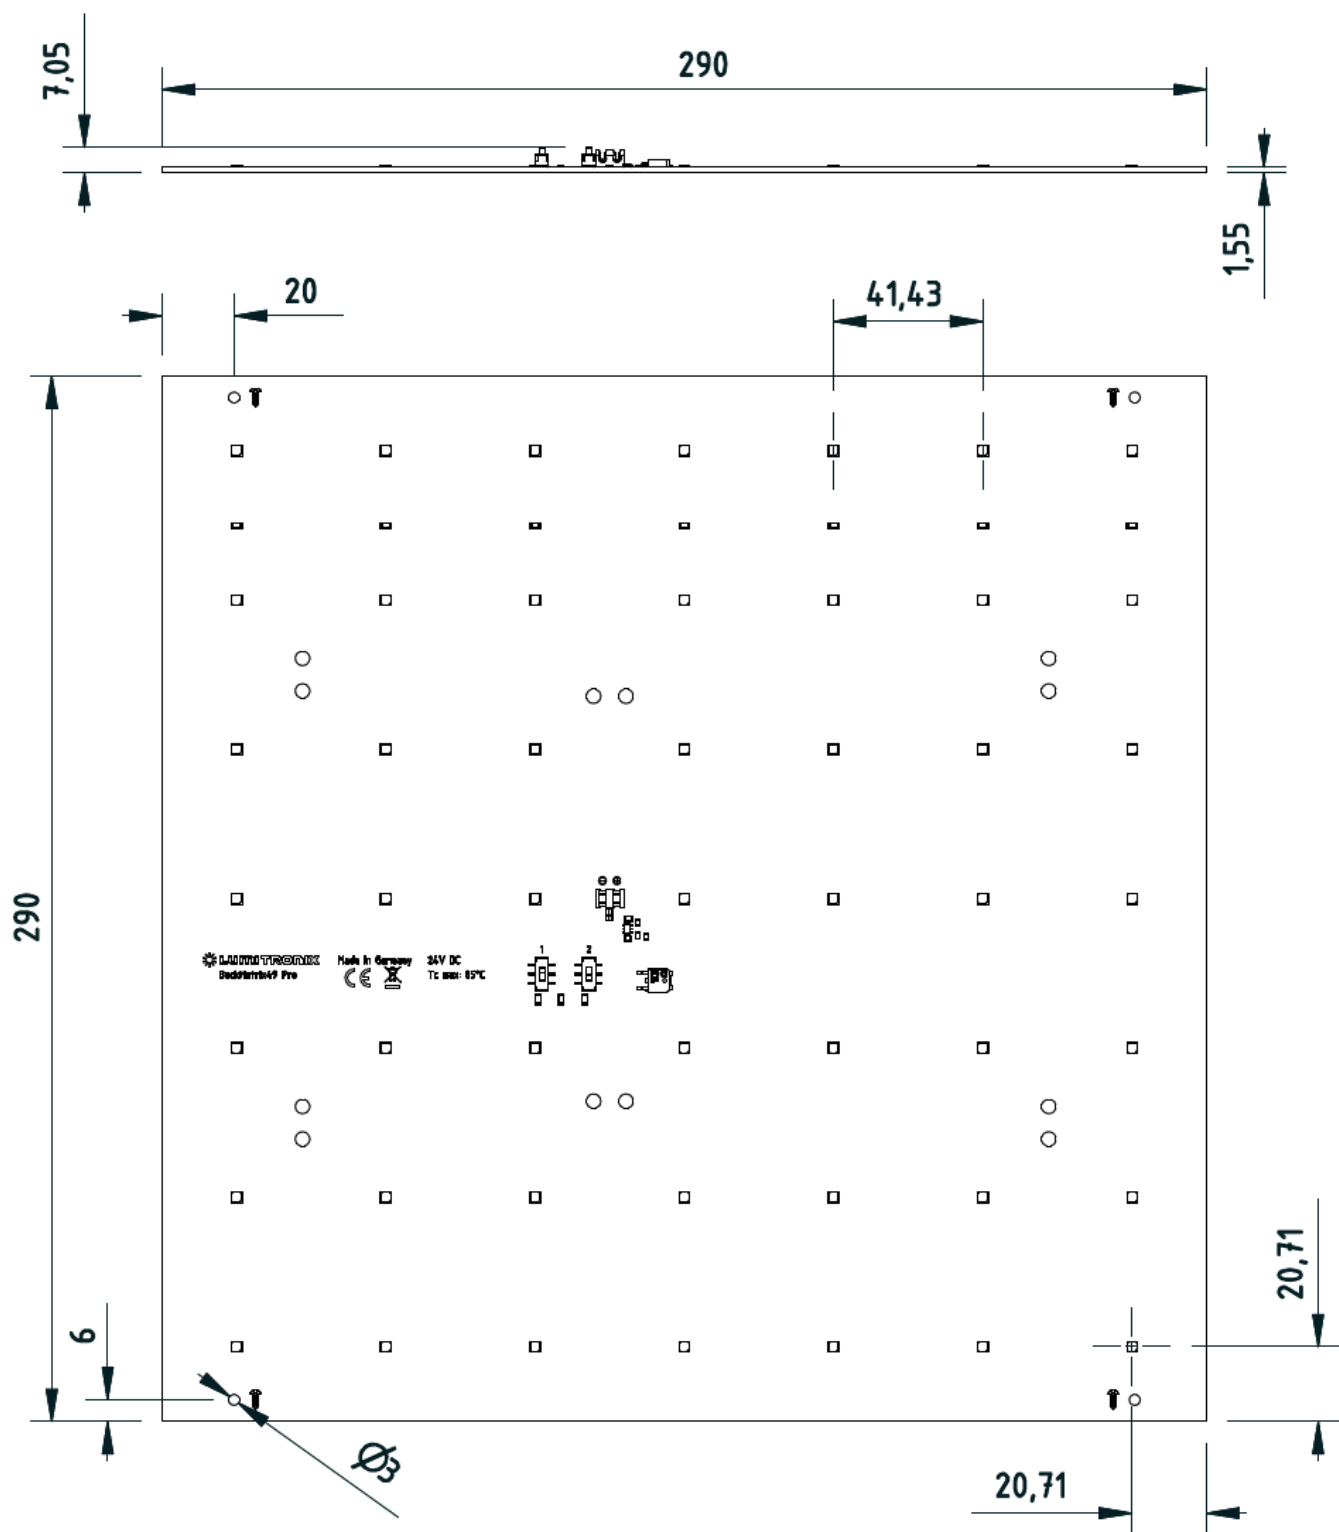

RADIANT FLUX vs. TEMPERATURE

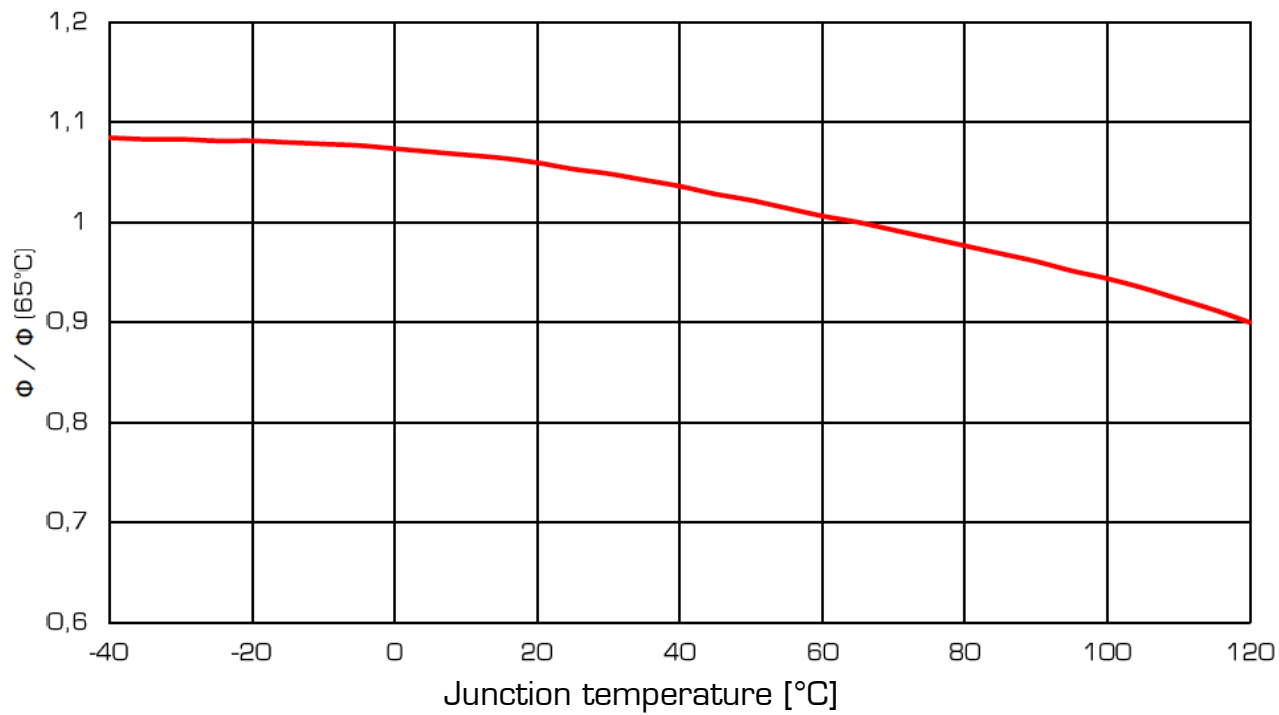


CURRENT vs. VOLTAGE

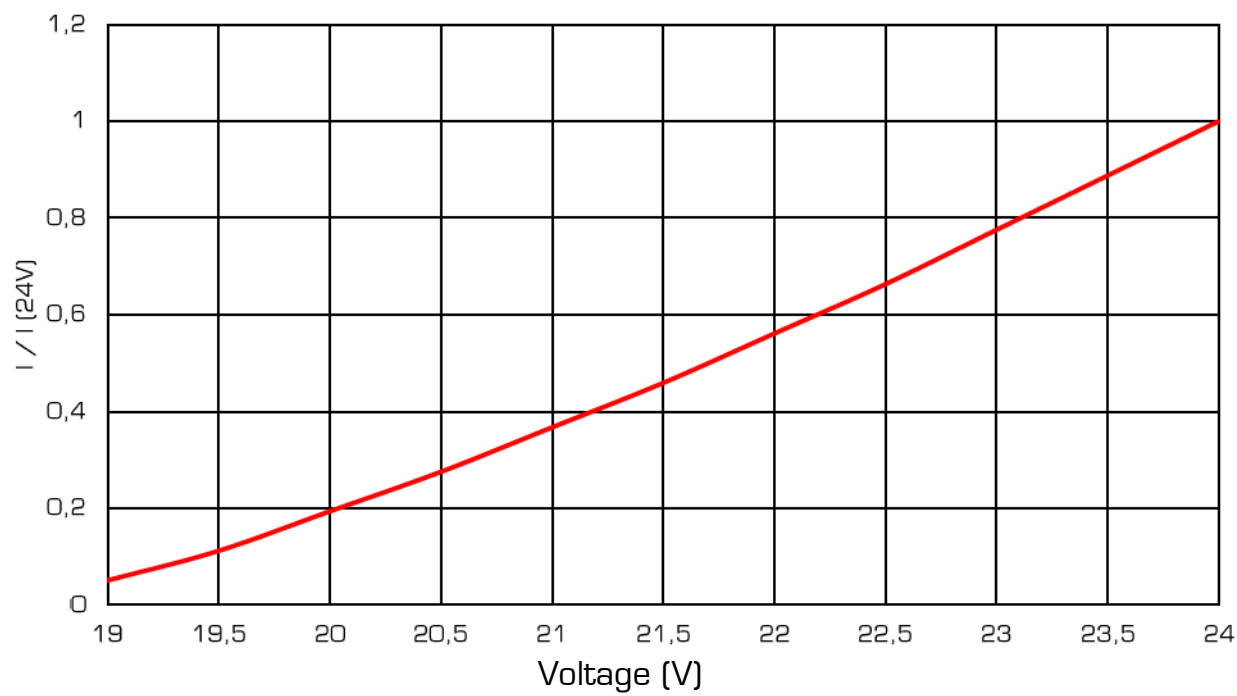

BACKMATRIX-49-3080 NICHIA LED MODULE WARM WHITE CRI80 3000K 3000LM 49 LEDS 24V 25W
120° 29X29CM

LUMINOUS FLUX vs. CURRENT

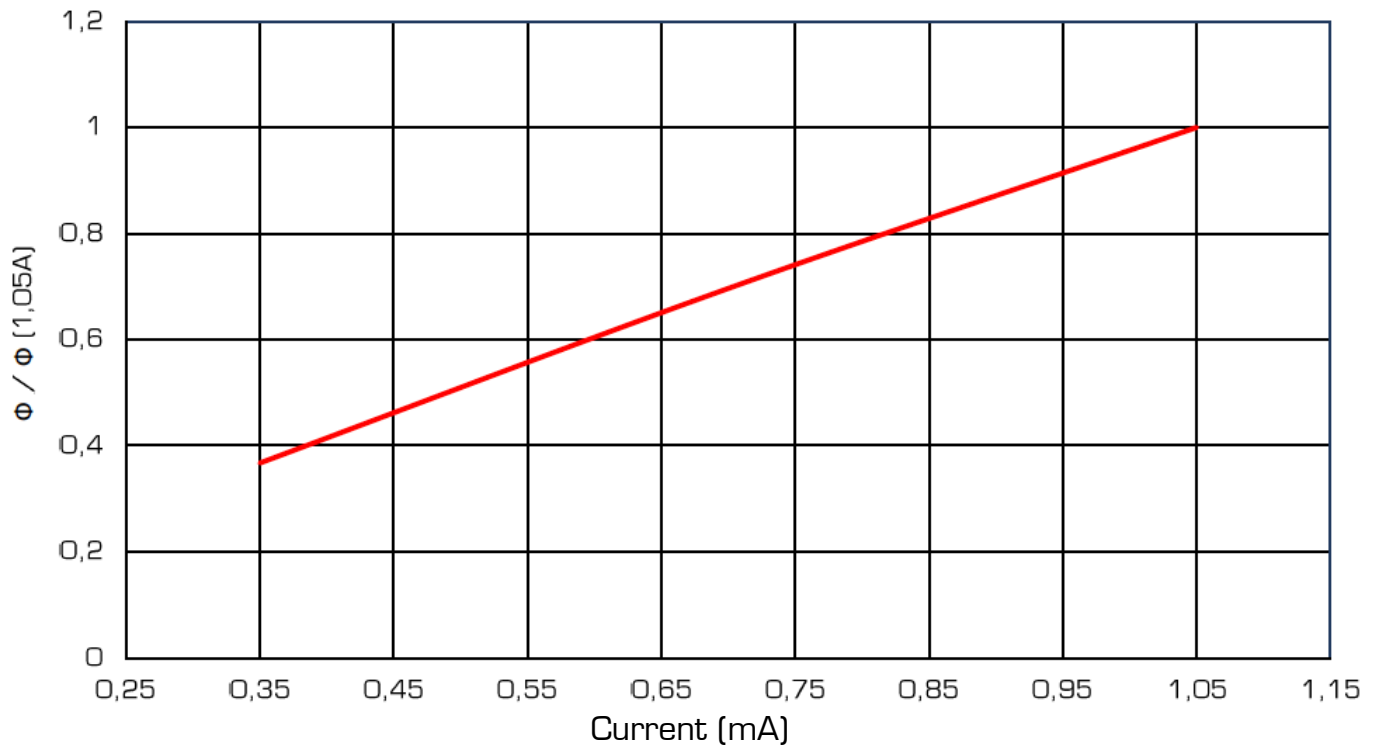

WARRANTY INFO




This LED module has 5 years commercial warranty. Please refer to <https://www.lumistrips.com/lumistrips-en-warranty> for warranty terms.

MANUFACTURING INFO



The LED module is **made in Germany**, at a production line that uses the innovative manufacturing technology of plasma direct metallization, to turn substrates into electrical conductive and solderable circuit boards, even those that before have not been suitable for an assembly with electronic components.

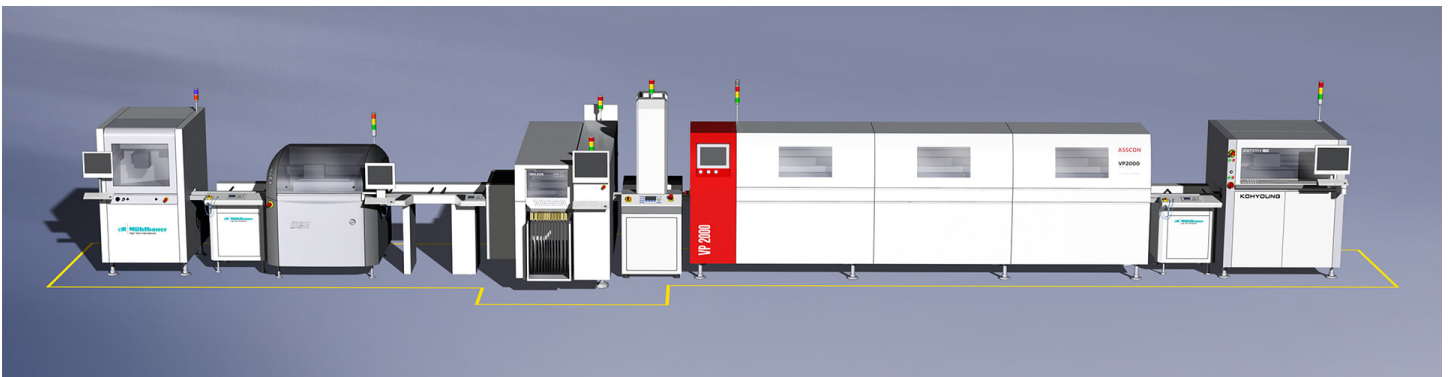

This LED module is made on a ISO-certified production line that has been tailored specifically to the requirements of assemblies with LED technology. Nearly one million components can be processed per day in the production line.

In the in-house assembly line, high performance automatic placement machines by Siemens place large and small components in an extremely fast and precise way. The vapour phase soldering machine by the market leader Asscon differs from ordinary convection soldering furnaces by its extraordinarily gentle soldering process under protection gas atmosphere. This

BACKMATRIX-49-3080 NICHIA LED MODULE WARM WHITE CRI80 3000K 3000LM 49 LEDS 24V 25W 120° 29X29CM

prevents oxidation and cold solder joints and improves the thermal connection of component and PCB. This is particularly advantageous for LEDs, whose aging scales with the operating temperature.

The entire process is flexibly adaptable to the requirements and batch sizes of our customers and runs fully automatically.

- State-of-the-art machinery with the latest technology
- Production of circuit boards with lengths of up to 600 mm
- Traceability thanks to laser bar codes
- Maximum process safety with fully automated processing
- ISO certification



ISO 9001 quality management system.



OHSAS 18000 health and safety management system.



ISO 14001 Environment Management System

Our professional LED Strips and Modules use LEDs from market leaders

We develop and produce our LED strips at a state of the art facility in Germany, with the highest quality standards and by using only LEDs from market leaders such as Nichia, Samsung or Toshiba.

- **Nichia** is the LED market leader, with over 25% market share and decades of experience. Nichia researchers invented the blue and white LED production technology, also receiving the Nobel Prize for this achievement. Nichia LEDs are the **most efficient** (200 lm / w efficacy), durable (> 100,000 hours) and are also available with unique technologies such as **Optisolis**, CRI98+ natural light spectrum and **Rsp0a**, special white light for horticulture.
- **Samsung** is in the top 10 of global LED manufacturers and a well-known brand, renowned for the high performance of its products combined with the competitive price
- **Toshiba** is a Japanese conglomerate with a history of more than a century, now specialized in semiconductors, electronics and hardware, with nearly 20,000 employees and an annual turnover of 40 billion USD. Toshiba has built the TRI-R technology and built the LED chips used in **SunLike CRI97+ LEDs** produced by Seoul Semiconductor in South Korea. With the new **SunLike™ TRI-R™** technology from Toshiba-SSC (Seoul



Semiconductor) and our strips and modules you can always enjoy a natural light source with the light spectrum very close to the sun.

- **Seoul Semiconductor** is in the top 10 of global LED manufacturers and renowned for innovation, durability and competitive price


Our strips have high quality components and professional support:

- We use LEDs from top brands and have superior designs
- We offer **professional support** for lighting projects
- The PCBs use high quality materials for best resistance, current flow and heat transfer
- Performance values in this datasheet match those in real world applications
- Function perfectly at high temperatures that would destroy many other strips.

CONNECTION OF LED MODULE

The insulation displacement terminal allows a solder free connection of the BackMatrix LED modules.


Connection cables with a conductor cross-section up to 1 sqmm (AWG18) can be used (SKU 37592). The tool Bit for BackMatrix LED modules (SKU 95402) is recommended for connection.

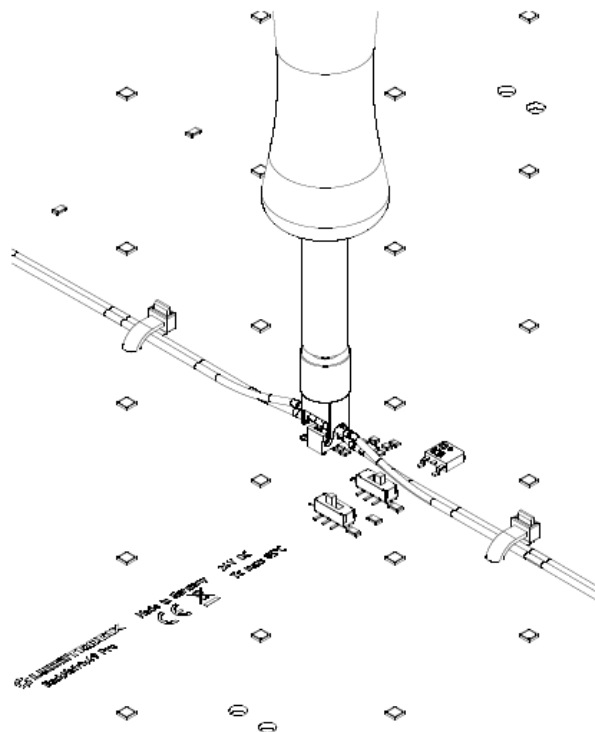

BACKMATRIX-49-3080 NICHIA LED MODULE WARM WHITE CRI80 3000K 3000LM 49 LEDS 24V 25W
120° 29X29CM


In this way, several modules can also be connected to each other without any problems. For additional cable fixation, holes are provided for e.g. cable ties.

Alternatively, the BackMatrix LED modules can also be electrically connected in the classic way with a solder connection.

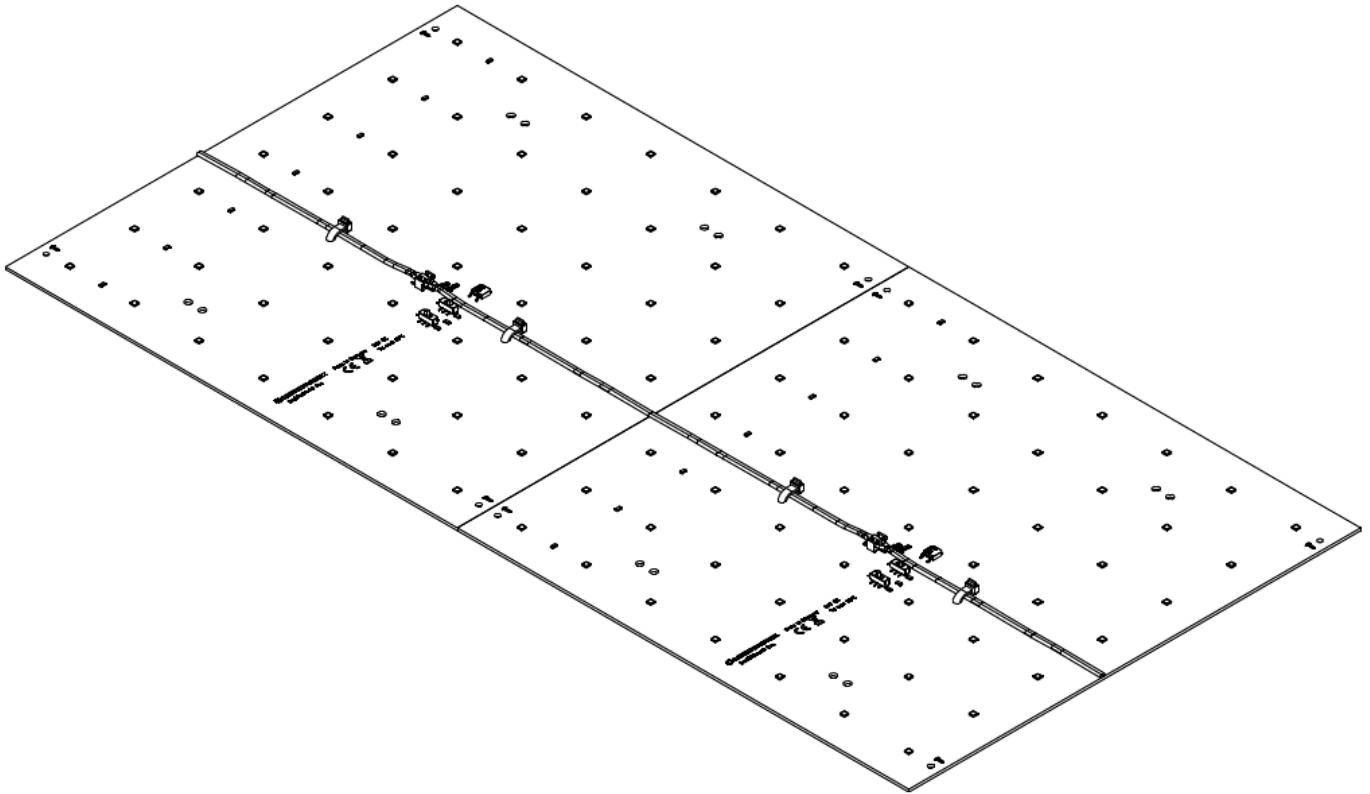


DIMMING

The 3 levels of dimming can be set via the onboard switches, as follows: 350 mA (low level), 700 mA (mid level), 1050 mA (full power).

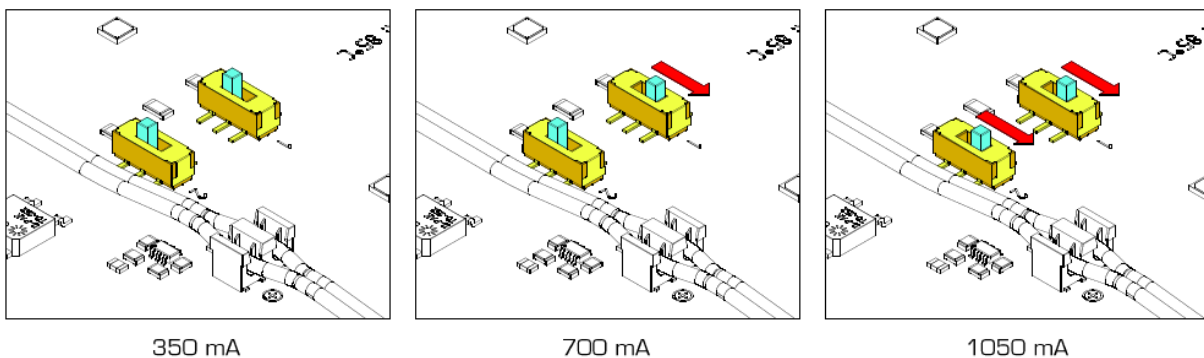

LED MODULE PRODUCT NAME EXPLAINED

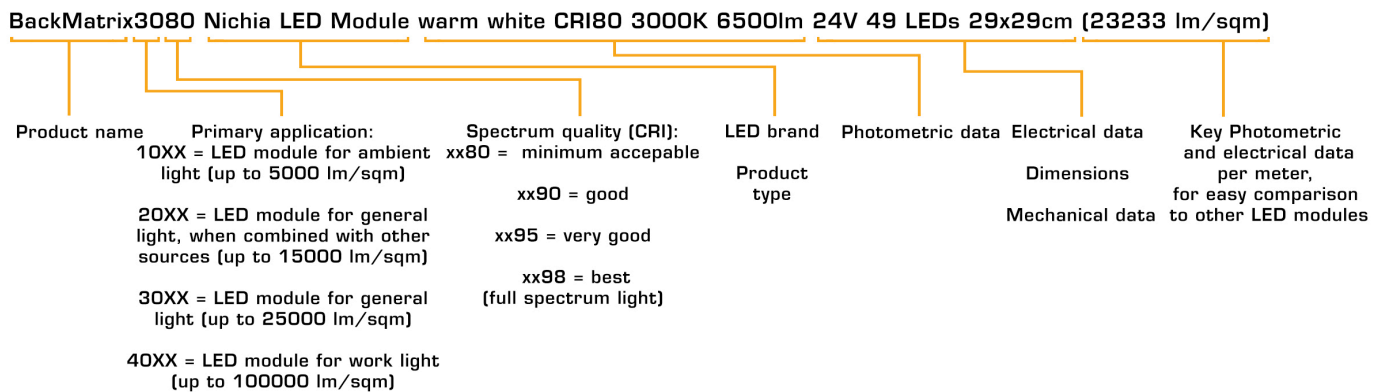

Due to the special conditions in the production process of LEDs, the specified values are statistical averages. The individual LED may deviate from them.

The LED modules and all their components must not be mechanically stressed.

Avoid undue claw action, e.g. by screwing or excessive bending.

The LED modules must not come into contact with aggressive chemical substances, either in operation or in storage.

The installation of the module (with the operating device) must be carried out in compliance with all applicable electrical and safety standards.

Pay attention to standard ESD precautions when installing the modules.

- The components on the LED modules must not be subjected to mechanical stress.
- The conductive paths on the boards must not be damaged or interrupted by the installation.
- Store and operate the LED modules only at a final humidity of 10% to 60%.

Our LED modules are not protected against overload, overtemperature and short-circuit currents. To operate the modules safely and reliably, it is therefore necessary to use an electronically stabilized power supply unit in which these

in which these safety functions are already integrated. If other power supplies than the ones distributed by us are used, the following protective

the following protective measures must be ensured on the power supply side:

MINIMUM REQUIREMENTS FOR POWER SUPPLIES: Short circuit protection - Overload protection - Overtemperature protection

- The installation of LED modules may only be carried out in compliance with all applicable regulations and standards by an authorized electrician.

Distribution and reproduction of this document, utilization and communication of its contents are prohibited unless expressly permitted. Any infringement will result in compensation for damages. All rights reserved in the event of patent, utility model or design registration.

We reserve the right to make technical changes.

This LED module can be purchased via the following websites:

www.ledrise.eu / www.lumistrips.com